


Twin-compartment wheeled bin system



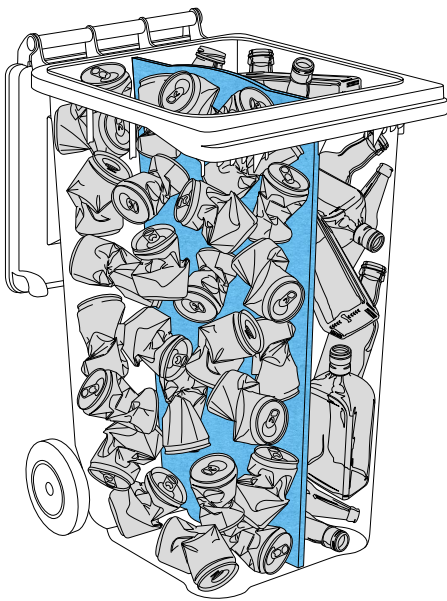

The Craemer twin-compartment wheeled bin system allows two different waste fractions to be presented for collection in separate compartments within a single bin. This tried and tested system has been used successfully in Scandinavia for many years in combination with split lifter/body vehicles able to collect different recycling and waste streams separately in a single vehicle.

The collection of materials separately with minimal cross-contamination has negated the need to sort post-collection resulting in better material quality. The provision of twin-compartment containers has reduced the number of bins issued to individual households and allowed collection agencies to manage their resources more efficiently.

The divider wall within each bin can be positioned to provide either 50/50 or 40/60 compartment ratios and is easily and securely fitted.

The special convoluted design feature of the divider wall provides strength and rigidity and allows easy discharge of contents.

Technical Specifications* ¹	MGBneo 240 L	MGBneo 340 L / 360 L
Exterior dimension (H x W x D, in mm) ²	Max. 1100 x 580 ± 5 x 740	Max. 1115 x 590 ± 20 x 880
Nominal volume (in L)	240	340 / 360
Nominal load capacity (in kg)	96	136 / 144
Weight (in kg)	14.5	21.0
Material Body / Lid	PE (resistant to frost, heat and many chemicals, cadmium free, with UV stabilisation)	
Container is based on	EN840, RAL-GZ 951/1, Directive 2000/14/EG	

Key Features

- Robust with uniform wall thickness and reinforcement of all walls
- External wheel Ø 250 mm, rubber-tired wheels, wheel axle from steel
- Release pins allow quick and easy lid replacement
- Integrated rain spoiler reduces rain water run-off into bin
- 30 mm diameter ergonomic handle
- Saloon Lid as 40/60, 50/50 or 60/40 split configurations
- Available in the following standard colours: grey, green, brown, blue, red, yellow
- Prepared for integration of RFID transponder



Options, available on request depending on quantity e.g

- Special colors
- External wheels, available with 200 mm Ø (MGBneo 240 L) or 300 mm Ø (MGBneo 340 L / 360 L) rubber tires
- Color clips to identify waste factors

Labelling

Hotstamping of letters, logo or numbering available on request depending on quantity.

Do you have questions or require detailed information? We are happy to advise you.

Craemer UK Ltd

Craemer House
Hortonwood
Telford, Shropshire TF1 7GN
United Kingdom

Freephone: 0800 032 4289
Tel.: +44 1952 6078-00
Fax: +44 1952 6078-01
E-mail: info@craemer.com

www.craemer.co.uk



¹All specifications quoted are subject to change. Craemer reserve the right to make changes to product design and specification. Extra equipment, accessories, as well as other colours are available at extra cost and on request.

²Maximum values according to DIN EN 840-2. Dimensions may vary within the tolerances given in the norm.