





TC1

1200 x 800 mm

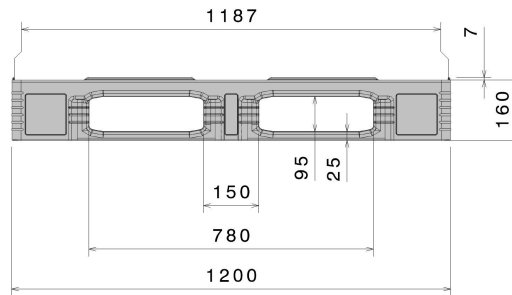

Art.-Nr.: 87065201



Technical Data**

| | | | |
|---------------------------|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Dimensions L x W x H (mm) | 1200 x 800 x 160 | | |
| Weight (kg) | 18,0 kg | | |
| Material*2 | PE | | |
| Load capacity (kg)*3 |  Static 7500 kg |  Dynamic 1250 kg |  In Racking System 1000 kg |



Characteristics

Colour: black
 Runners: 3, unwelded
 Rims: 7 mm
 Temperature stability: -30°C to +40°C, briefly up to +90°C

Options

Transponder (RFID)
 Reinforcement profiles
 Rimoptions
 Lid

Loading quantities (Pcs / Approximate amount)

| | | |
|-----------------------------------------------------------------------------------------------------|---------------------------|----------------------------------------------------------|
|  Container | Container 20': 192 | Container 40' High Cube: 440 |
| | Container 40': 390 | Conventional trailer 45' high cube container: 495 |
|  Truck | MEGA-Trailer: 612 | Jumbo: 684 |

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20°C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20°C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.