
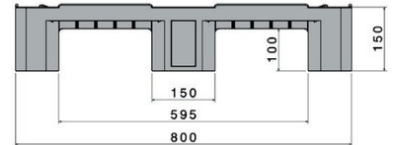


D1

1200 x 800 mm

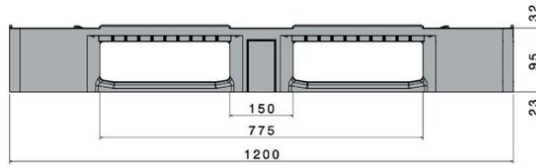

Art.-Nr.: 83360231

Technical Data*1

Dimensions L x W x H (mm)	1200 x 800 x 150		
Weight (kg)	14,5 kg		
Material*2	PE		

Load capacity (kg)*3	 Static 5000 kg	 Dynamic 1250 kg	 In Racking System 1000 kg
----------------------	--	---	---

Characteristics

Colour: black
 Runners: 3, unwelded
 Reinforcement profiles: 3
 Rims: 7 mm
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Options


Transponder (RFID)
 Reinforcement profiles
 Rim options
 Antislip
 Lid

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 215	Container 40' High Cube: 465
	Container 40': 440	Conventional trailer 45' high cube container: 528
 Truck	MEGA-Trailer: 646	Jumbo: 722

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
 *2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
 *3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.