
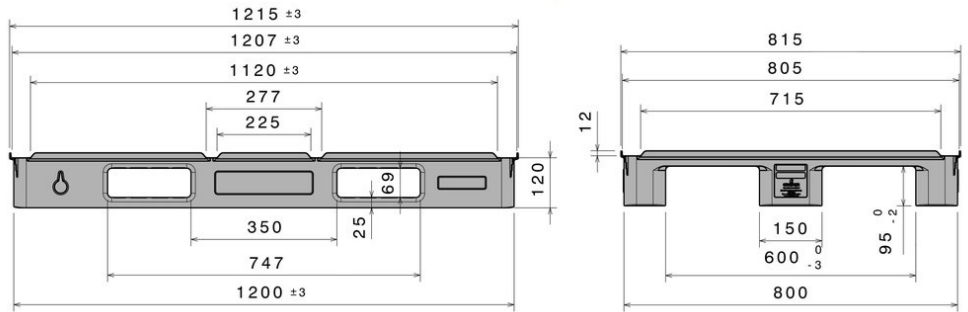



SL1

1200 x 800 mm

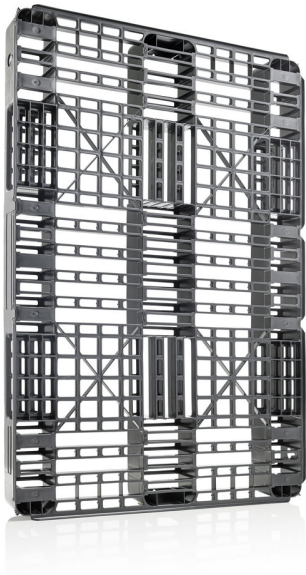

Art.-Nr.: 83259802

Technical data				
Dimensions L x W x H (mm)		1200 x 800 x 120		
Weight(kg)		7.0 kg		
Material*2		PE		
Load capacity (kg)		 Static 2000 kg	 Dynamic 1000 kg	 In Racking System -
Characteristics		Options		
Colour: basalt grey		Rimoptions		
Runners: 3, unwelded				
Rims: 12 mm				
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C				
Loading quantities (Pcs / Approximate amount)				
 Container	Container 20': 248 Container 40': 504	Container 40' High Cube: 558 Conventional trailer 45' high cube container: 680		
 Truck	MEGA-Trailer: 816	Jumbo: 912		
Labelling				
Customised printing and numbering available on request depending on quantity. Position upon consultation.				

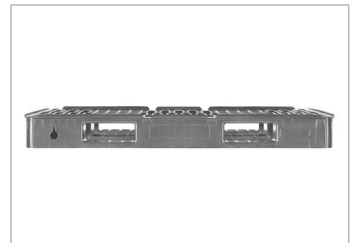

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20°C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20°C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.