




CR3-5

1200 X 1000 mm

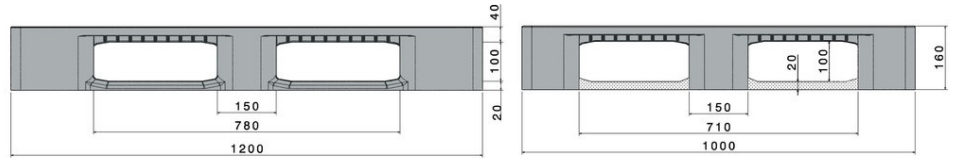

Art.-Nr.: 83332202



Technical Data**

Dimensions L x W x H (mm)	1200 X 1000 X 160		
Weight (kg)	21,5 kg		
Material*2	PE		
Load capacity (kg)*3	Static 5000 kg	Dynamic 1250 kg	In Racking System 1000 kg

Characteristics

Colour: black / light blue
 Runners: 5, unwelded
 Rims: 5 mm
 Antislip: Palgrip® anti-slip strips on the top deck
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Options


Transponder (RFID)
 Reinforcement profiles
 Rimoptions
 Lid

Loading quantities (Pcs / Approximate amount)

Container	Container 20': 141	Container 40' High Cube: 340
	Container 40': 300	Conventional trailer 45' high cube container: 416
Truck	MEGA-Trailer: 468	Jumbo: 504-540

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.