



CS3 ESD

1200 X 1000 mm

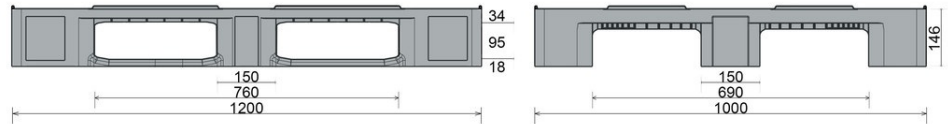

Art.-Nr.: 83222201

Technical Data**		
Dimensions L x W x H (mm)	1200 X 1000 X 146	
Weight (kg)	16,0 kg	
Material*2	PE, ESD	
Load capacity (kg)*3	 Static 5000 kg	 Dynamic 1000 kg
		 In Racking System 400 kg
Characteristics		Options
Colour: black Runners: 3, unwelded Rims: 7 mm Temperature stability: -30°C to +40°C, briefly up to +90°C ESD pallet Surface resistance of $\geq 1 \times 10^9 \Omega \text{m}$ to $< 1 \times 10^{11} \Omega \text{m}$		Rimoptions Transponder (RFID) Lid
Loading quantities (Pcs / Approximate amount)		
 Container	Container 20': 140 Container 40': 330	Container 40' High Cube: 365 Conventional trailer 45' high cube container: 416
 Truck	MEGA-Trailer: 494	Jumbo: 532-570
Labelling		
Customised printing and numbering available on request depending on quantity. Position upon consultation.		



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20°C.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20°C.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100h at a room temperature of approx. 20°C.