




## TC3-5 Palgrip®

1200 X 1000 mm

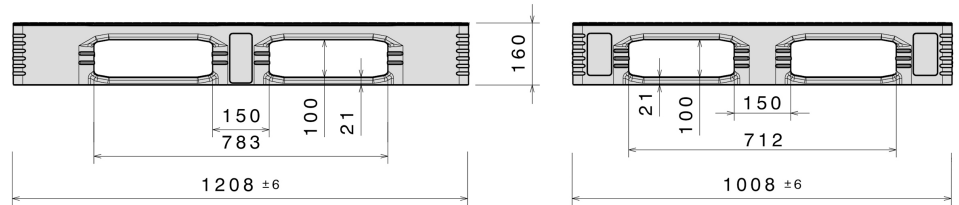

Art.-Nr.: 87039899

Palgrip

### Technical Data\*\*1

Dimensions L x W x H (mm) 1200 X 1000 X 160

Weight (kg) 24,0 kg

Material\*2 PE

Load capacity (kg)\*3



**Static**  
7500 kg



**Dynamic**  
1500 kg



**In Racking System**  
1250 kg

### Characteristics

Colour: light grey  
Runners: 5, unwelded

Antislip: yes, Palgrip® - Anti-slip top deck  
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

### Options




Reinforcement profiles  
Lid  
Transponder (RFID)

### Loading quantities (Pcs / Approximate amount)

Container	Container 20': <b>141</b> Container 40': <b>300</b>	Container 40' High Cube: <b>340</b> Conventional trailer 45' high cube container: <b>416</b>
Truck	MEGA-Trailer: <b>468</b>	Jumbo: <b>504-540</b>

### Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

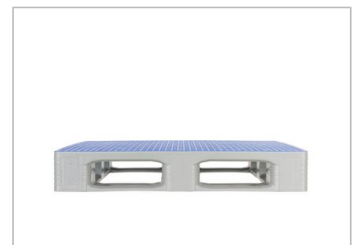

\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

**Dynamic load:** on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

**In racking system:** evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.