




TC3
47.6" x 39.7"

Art.-Nr.: 87035341

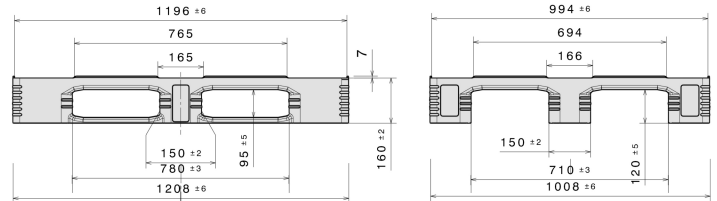

Technical Data*1

Dimensions L x W x H	47.6 x 39.7 x 6.3" (1200 x 1000 x 160 mm)
Weight (lbs)	47 lbs
Material*2	PE
Load capacity (lbs)	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Static 16550 lbs</p> </div> <div style="text-align: center;">  <p>Dynamic 3350 lbs</p> </div> <div style="text-align: center;">  <p>In Racking System 2800 lbs</p> </div> </div>

Characteristics

Color: light blue
Runners: 3, unwelded
Rims: 0.3"
Temperature stability: -22°F to +104°F, briefly up to +194°F

Options

Transponder (RFID)
Reinforcement profiles
Rim options
Lid

Loading quantities (Pcs / Approximate amount)

 Container	Container 20': 141 Container 40': 300	Container 40' High Cube: 340 Conventional trailer 45' high cube container: 416
	 Truck	MEGA-Trailer: 468

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 68°F.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 68°F.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 68°F.