




# CB3 High

47.2 x 39.4 x 44.9" / 264 gal

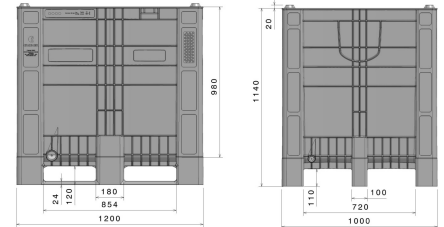

Art.-Nr.: 83271810

## Technical Data\*1

External Dimensions	47.2 x 39.4 x 44.9" (1200 x 1000 x 1140 mm)	Internal Dimensions	43.6 x 35.3 x 38.7" (1108 x 897 x 983 mm)
Weight (lbs)	109 lbs	Volume (l)	264 gal
Material*2	PE		

Load capacity (lbs)	 <b>Stacking Load</b> 8850 lbs	 <b>Holding Capacity</b> 2250 lbs	 <b>Dynamic Load</b> 3350 lbs
---------------------	--	---	---

## Characteristics Options

<b>Characteristics</b> Color: light grey Manufactured in one piece Runners: 3, unwelded Stackable Temperature stability: -22°F to +104°F, briefly up to +194°F Resistant to most chemicals and cleaning agents Food-safe. HACCP compliant Container is based on DIN EN 13626 and DIN EN ISO 12048	<b>Options</b> Trunnions 9 feet Lid
---	--

## Loading quantities (Pcs / Approximate amount)

 <b>Container</b>	Container 20': - Container 40': -	Container 40' High Cube: <b>44</b> Conventional trailer 45' high cube container: <b>52</b>
---	--------------------------------------	---

 <b>Truck</b>	MEGA-Trailer: <b>52</b>	Jumbo: <b>56-60</b>
---	-------------------------	---------------------

## Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.  
 \*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.  
 \*3 Stacking Load: with a holding capacity of 1000 kg at approx. 68 °F.  
 Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 68 °F.