




SB3

47.2 x 39.4 x 39.4" / 161 gal

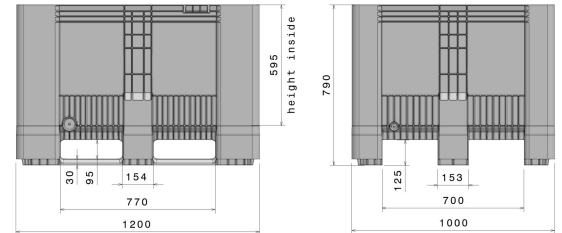

Art.-Nr.: 81941510

Technical Data*1

External Dimensions	47.2 x 39.4 x 31.1" (1200 x 1000 x 790 mm)	Internal Dimensions	44.1 x 35.9 x 24.4" (1122 x 912 x 620 mm)
Weight (lbs)	43,5 kg	Volume (l)	610 l
Material*2	PE		

Load capacity (lbs)	Stacking Load 5000kg	Holding Capacity 700kg	Dynamic Load 1200kg
---------------------	--------------------------------	----------------------------------	-------------------------------

Characteristics Options

<p>Color: green</p> <p>Manufactured in one piece</p> <p>Runners: 3, unwelded</p> <p>Stackable</p> <p>Temperature stability: -22°F to +104°F, briefly up to +194°F</p> <p>Resistant to most chemicals and cleaning agents</p> <p>Food-safe. HACCP compliant</p> <p>Container is based on DIN EN 13626 and DIN EN ISO 12048</p>	<p>Drain port</p> <p>Fully perforated walls / base</p> <p>9 feet</p> <p>Lid</p>
---	---

Loading quantities (Pcs / Approximate amount)

Container	Container 20': 30 Container 40': -	Container 40' High Cube: 84 Conventional trailer 45' high cube container: 104
Truck	MEGA-Trailer: 130	Jumbo: 140-150

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 Stacking Load: at a room temperature of approx. 68 °F.
Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 68 °F.