




# HB3

47.2 x 39.4 x 31.1" / 164 gal

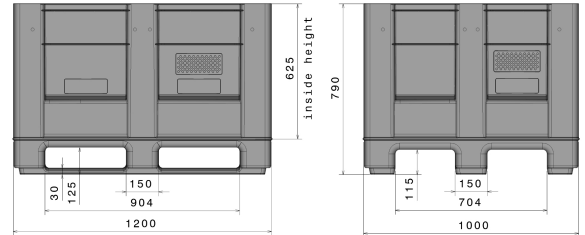

Art.-Nr.: 83421813

## Technical Data\*1

External Dimensions	47.2 x 39.4 x 31.1" (1200 x 1000 x 790 mm)	Internal Dimensions	43.9 x 36.0 x 24.6" (1115 x 915 x 625 mm)
Weight (lbs)	99 lbs	Volume (l)	164 gal
Material*2	PE		

Load capacity (lbs)	<b>Stacking Load</b> 11050 lbs	<b>Holding Capacity</b> 3350 lbs	<b>Dynamic Load</b> 4200 lbs
---------------------	-----------------------------------	-------------------------------------	---------------------------------

## Characteristics Options

<b>Characteristics</b> Color: light grey Runners: 3, welded Reinforcement profiles: 3 Stackable Temperature stability: -22°F to +104°F, briefly up to +194°F Resistant to most chemicals and cleaning agents Food-safe. HACCP compliant Container is based on DIN EN 13626 and DIN EN ISO 12048	<b>Options</b> Lid Drain port Transponder (RFID)
---	---

## Loading quantities (Pcs / Approximate amount)

<b>Container</b>	Container 20': <b>32</b> Container 40': <b>84</b>	Container 40' High Cube: <b>84</b> Conventional trailer 45' high cube container: <b>104</b>
------------------	--	--

<b>Truck</b>	MEGA-Trailer: <b>104</b>	Jumbo: <b>112-120</b>
--------------	--------------------------	-----------------------

## Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.  
 \*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.  
 \*3 Stacking load with a holding capacity of 1985 lbs (900 kg) at room temperature. Dynamic load on a forklift with an evenly distributed load at a room temperature.