



TC3-5 Palgrip®

1200 X 1000 mm

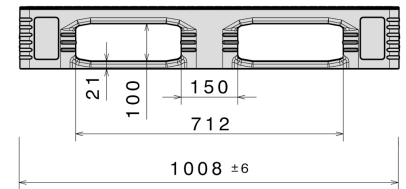

Art.-Nr.: 87039899

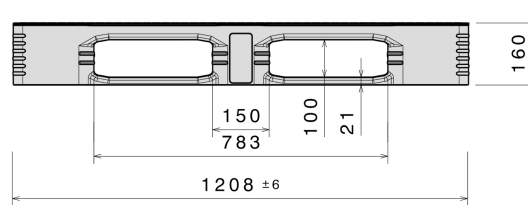

Technical Data*1

Dimensions L x W x H (mm)	1200 X 1000 X 160
Weight (kg)	24,0 kg
Material*2	PE

Load capacity (kg)*3



Static
7500 kg



Dynamic
1500 kg



In Racking System
1250 kg

Characteristics

Colour: light grey
Runners: 5, unwelded

Antislip: yes, Palgrip® - Anti-slip top deck
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Options




Reinforcement profiles
Lid
Transponder (RFID)

Loading quantities (Pcs / Approximate amount)

	Container	Container 20': 141 Container 40': 300	Container 40' High Cube: 340 Conventional trailer 45' high cube container: 416
		Truck	MEGA-Trailer: 468 Jumbo: 504-540

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.

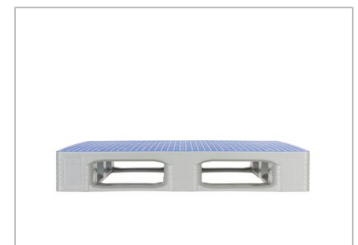

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.