



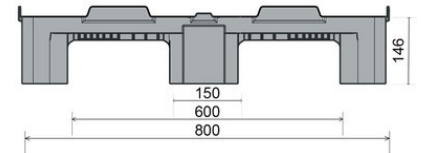

CS1 ESD

1200 x 800 mm

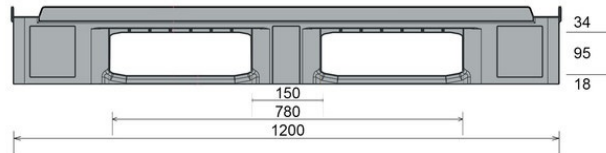

Art.-Nr.: 83192208

Technical Data*1

| | | | |
|---------------------------|--|---|--|
| Dimensions L x W x H (mm) | 1200 x 800 x 146 | | |
| Weight (kg) | 12,5 | | |
| Material*2 | PE, ESD | | |
| Load capacity (kg)*3 |  Static 5000 kg |  Dynamic 1000 kg |  In Racking System 400 kg |


| Characteristics | Options |
|--|--|
| Colour: black Runners: 3, unwelded Rims: 22 mm outside Temperature stability: -30°C to +40°C, briefly up to +90°C ESD pallet Surface resistance of $\geq 1 \times 10^{10}$ E4 Ohm to $< 1 \times 10^{11}$ Ohm | Rimoptions Welded runner Transponder (RFID) Lid |

Loading quantities (Pcs / Approximate amount)

| | Container | Truck |
|--|------------|--------------------------|
| Container 20' | 215 | MEGA-Trailer: 627 |
| Container 40' | 440 | Jumbo: 722 |
| Container 40' High Cube | 465 | |
| Conventional trailer 45' high cube container | 528 | |

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20°C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20°C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.